



Water-Inflated Dams

**Quick Installation • Reusable
Compact • In-Field Repairable**


FLOOD PROTECTION



1-800-245-0199
www.aquabarrier.com




**AQUA-BARRIER® UTILIZES A UNIQUE
INTERNAL BAFFLE FOR STABILITY THAT
ALSO ALLOWS FOR SINGLE PORT INFLATION**

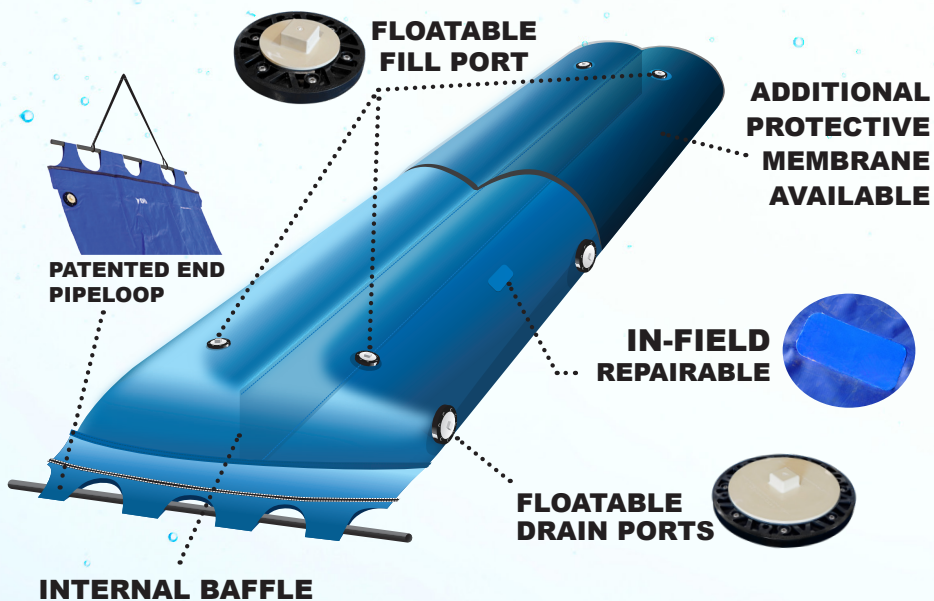

**COMPACT
FOR SHIPPING
& STORAGE**



**EASE-OF-USE
ACCESSORIES
FOR MINIMAL MANPOWER**

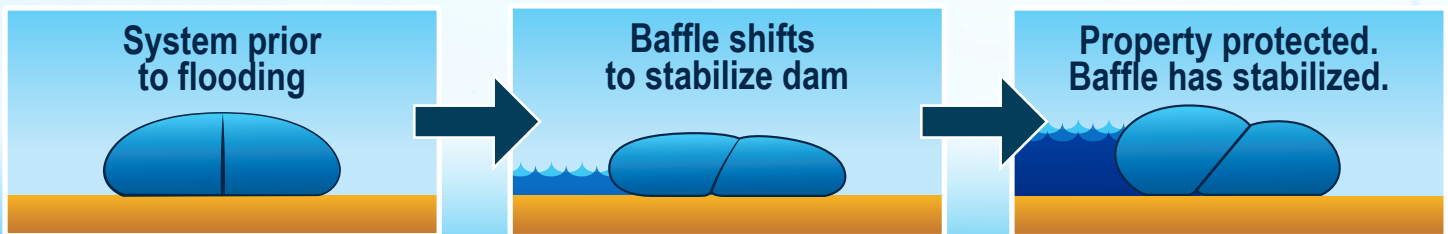

INFLATED BARRIER Height and Width		MAX CONTROLLABLE WATER AND SEDIMENT		INFLATED BARRIER VOLUME		CONNECTION OVERLAP REQUIREMENTS	
ft.	m.	ft.	m.	(Gal. per linear ft.)	(l/m) (approx.)	ft.	m.
2 x 4.5	0.6 x 1.4	1.50	0.45	56	700	3	0.9
3 x 6.75	0.9 x 2.1	2.25	0.65	131	1,600	4.5	1.4
4 x 9	1.2 x 2.7	3.00	0.90	225	2,800	6	1.8
5 x 11.25	1.5 x 3.4	3.75	1.10	352	4,400	7.5	2.3
6 x 13.5	1.8 x 4.1	4.50	1.35	506	6,300	9	2.7
7 x 15.75	2.1 x 4.8	5.25	1.60	688	8,500	10.5	3.1
8 x 18	2.4 x 5.5	6.00	1.80	901	11,100	12	3.6

AQUA-BARRIER®

Available for Purchase
Reusable 15-20 Times



CALL NOW!

1-800-245-0199